



*Upto 120 Lumens Per Watt**

5 Years Product Warranty

2 Years Driver Warranty

- ✦ High Lumen Surface Mount LED for maximum efficacy
- ✦ Low Thermal Resistance
- ✦ High efficient Drivers with Power Factor and Protections
- ✦ Environmental friendly: RoHS Compliance
- ✦ Excellent reliability with nitride phosphor system
- ✦ Attractive New Age Slim Aluminum Cabinet
- ✦ Dimming Option supported in all models[#]
- ✦ Lifetime > 50,000 hrs

AN INDIAN PRODUCT !

* As per Mfg Test Report
Against order

www.rayssled.com

For Enquiries: sales@rayssled.com

DOWN LIGHTS



RDL-A-1W RDL-TA-1W Tilt RDL-TS-1W Tilt
 Aluminium Finish SS Finish
 Available in Round / Square



RDL-B-1W Tilt Black



RDL 1W - 3W

Powered by
 High Power
 1W LED

Luminous flux:
 White - 130 lm Per Watt
 Other - 110 lm Per Watt

Colors Available ○ ● ● ● ●

FLAT DOWN LIGHTS

Powered by
DOMINANT™
 Opto Technologies
 Innovating Illumination



Model: RFDL - 5W R/Sq
 LED: Dominant 5630 (0.5W)
 Luminous flux:
 Dimension: Outer Dia - 100MM
 Cut Dia - 85MM

Model: RFDL - 8W R/Sq
 LED: Dominant 5630 (0.5W)
 Luminous flux:
 Dimension: Outer Dia - 120MM
 Cut Dia - 95MM



Power Factor > 0.8 | Input Voltage: 145 - 270 VAC | CRI > 80 Ra

FLAT DOWN LIGHTS

Model: RFDL - 12W R/Sq


LED: R - Dominant 5630 (0.5W)

LED: Sq - Refond 2835 (0.2W)

Luminous flux:

Dimension: Outer Dia - 150MM

Cut Dia - 125MM




Model: RFDL - 18W R/Sq

LED: Dominant 5630 (0.5W)

Luminous flux:

Dimension: Outer Dia - 170MM

Cut Dia - 145MM

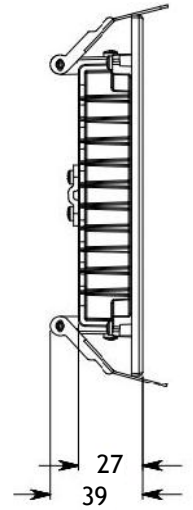

Model: RFDL - 24W R/Sq

LED: R - Dominant 5630 (0.5W)

LED: Sq - Refond 2835 (0.2W)

Luminous flux:

Dimension: Outer Dia - 200MM

Cut Dia - 175MM

Model: RFDL - 30W Sq

LED: Refond 2835 (0.2W)

Luminous flux:

Dimension: Outer Dia - 242MM

Cut Dia - 215MM



Power Factor > 0.9 | Input Voltage: 145 - 270 VAC | CRI > 80 Ra

Color Available: White - 6500K | Warm White - 3000K | Neutral White - 4000K

FLAT PANEL DOWN LIGHTS [LED- Kingbright 2835 - 0.2W (LM 80)]

2 - Years Warranty

Model: RFPL - 8W Sq

Dimension: Outer Dia - 125mm

Cut Dia - 100mm

Model: RFPL - 8W Ro

Dimension: Outer Dia - 132mm

Cut Dia - 115mm



Luminous flux: 850 lm

Model: RFPL - 15W Sq

Dimension: Outer Dia - 180mm

Cut Dia - 150mm

Model: RFPL - 15W Ro

Dimension: Outer Dia - 181mm

Cut Dia - 163mm

Luminous flux: 1595 lm

Model: RFPL - 22W Sq

Dimension: Outer Dia - 208mm

Cut Dia - 182mm

Model: RFPL - 22W Ro

Dimension: Outer Dia - 210mm

Cut Dia - 192mm

Luminous flux: 1915 lm

